SAMSUNG SAMSUNG

CY-TF65BBC (Tray for WM55B/WM65B only)				
	Dimension (mm)	Set	269.8 x 111.3 x 56.9	
Mechanical Spec		Package	294 x 136 x 69	
	Weight (kg)	Set	0.5	
		Package	0.7	
	Color		Gray White	
	Extra Connectivity Ports Included		USB1	
			USB External (In/Out) 1	
Connectivity			Touch Out1	
			HDMI 1	
			USB-C 1	
Accessories			Installation Guide Screws	

STN-WM55R (Stand for WM55B only)					
	Dimension (mm)	Set	835 x 1632.9 x 850.6		
		Package	1650 x 860 x 208		
	Weight (kg)	Set	34.5		
Mechanical Spec		Package	41.5		
	Color		Light Gray		
	VESA Mount		400 X 400		
	Rotation		N/A		
Accessories	Included		Installation Guide		
Feature	Special H/W		Slim Design No Assembly Required Installation		

Samsung Flip Pro

WMB Series

Unlimited learning possibilities.

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com.

Smart Signage

For more information about Samsung Smart Signage WMB Displays, visit www.samsung.com/business or www.samsung.com/displaysolutions

Copyright © 2022 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.

416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-772, Korea



Take every learning experience to the next level

What is Flip Pro?


Introducing Samsung Flip Pro, the premium interactive display that takes learning experiences to the next level. With intuitive writing, comprehensive connectivity, smart solutions and brilliant hardware, Flip Pro provides both educators and students with boundless resources and great flexibility to create engaging learning. Experience unlimited learning possibilities with Samsung Flip Pro.

Technology highlights

* Each feature may vary by model



Touch & Writing

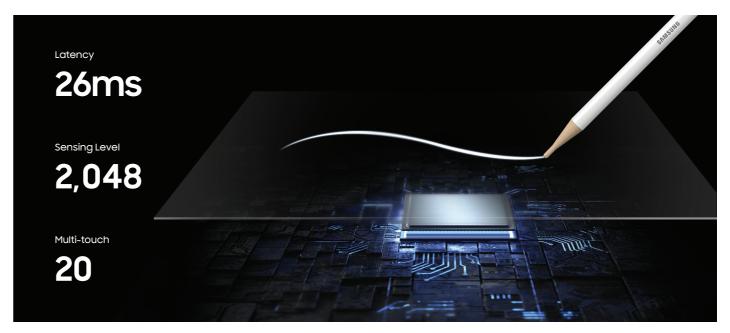


Fast & multi-touch

Better interaction with best-in-class multi-touch

Samsung Flip Pro creates a realistic, smooth writing and drawing experience with touch technology with 26ms* latency and 2,048 points of thickness built directly into the display. Industry-best touch latency was achieved by Samsung's proprietary prediction logic which analyzes user's writing patterns. Plus, Flip Pro enables multi-touch for up to 20 people for enhanced interactivity.

* When using single touch.

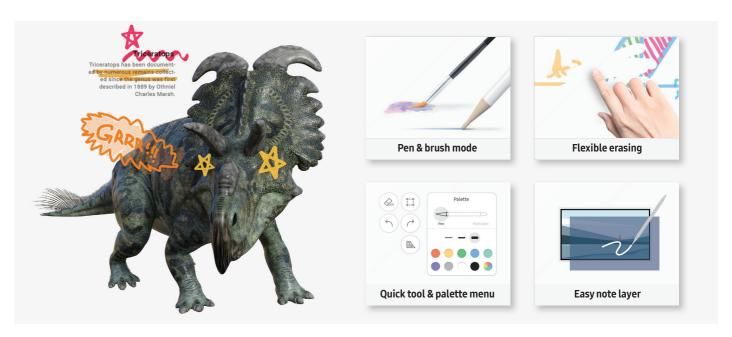

Intuitive writing & drawing

Bring ideas to life in an instant

Ideas are brought to life instantly on Flip Pro with an intuitive user interface. Samsung Flip's unique pen and brush mode provides a real-world writing experience with various options, while flexible erasing requires just a swipe of your finger or palm. The quick tool and palette menu ensure creativity flows and toggle button easily enables a new note layer UI.

2

^{*} All images are simulated for illustrative purposes.




Versatile connectivity

Stay connected from any source

Flip Pro provides multiple connectivity options, including USB, HDMI, DP and OPS mount*. Educators can easily connect any device to access content and display information on a larger screen, as well as connect to any network and other devices through LAN port and wireless screen-mirroring.

* OPS mount is currently only available on WM75B and WM85B.

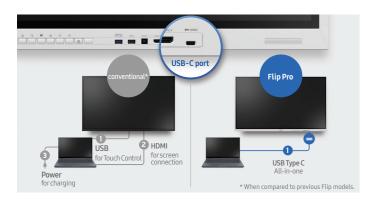


3-in-1 USB-C port

One single port for three functions

Connectivity is enhanced with three-in-one USB Type-C connectivity, enabling screen mirroring, touch control and external device charging (max. 65W)*, allowing educators to deliver interactive and engaging lessons without any hassle.

* Power delivery varies by model.

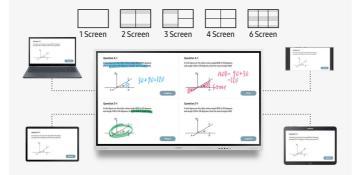

SmartView+

Smart, wireless sharing from multiple devices

With SmartView+, up to 50 devices can be simultaneously connected to the interactive display wirelessly, in addition to enabling multi-view on up to four screens, ideal for larger meeting rooms as well as digitized classrooms.



AirPlay 2

Share with AirPlay 2


Flip Pro is integrated with AirPlay 2, allowing educators and students to present on the big screen, increasing visibility and engagement in larger spaces, while ensuring no student misses out on important information.



OPS Mount

Use your favorite third-party education solutions

With OPS(Open Pluggable Specification) mount*, Flip Pro enables educators to use their third-party education solutions, allowing them to deploy school information systems(SIS), learning apps and tools.

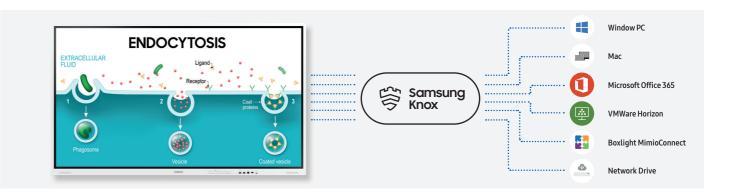

Workspace

Access whatever you need, from anywhere

With Workspace secured by Knox, Flip Pro enables users to easily access remote PC, network drive and other third-party applications such as Office 365, VMWare, Boxlight MimioConnect and video call applications*. This ensures efficiency from any location and an uninterrupted workflow for educators and students.

* Available apps may vary by region and require service subscription



Boxlight MimioConnect

Optimize lesson planning with embedded learning solution

Flip Pro offers the MimioConnect* app, an online blended learning platform, providing an extensive catalog of versatile learning content.

* Service availability varies by region and requires Boxlight subscription.



Video call application

Collaborate with ease over video conferencing

Video conferencing* is supported on Flip Pro based on the WebRTC(Real Time Communication) API, supporting apps such as Google Duo without the need for additional solution compatibility.

* Video call application will be available through a firmware update available Q2 2022. Webcam must be purchased separately.

** Supported webcam(9models): Logitech C930e, C922, C922x, C925E, C920s, C920, C920-CC930C,







Remote content push

Keep informed with remote management solution

Using Samsung's MagicINFO Remote Management solution*, Flip Pro offers new functionality that pushes content, alerts and warnings from the school information system to the display, notifying teachers and students of important updates which can be pushed directly to Flip displays in every classroom.

^{**} OPS mount is currently only available on WM75B and WM85B.

^{*} Requires MagicINFO license to use this service and SIS(School Information Service) should be separately built and integrated with MagicINFO

Hardware



4.0Ch. 40W speaker

Engage learners with immersive sound

Flip Pro offers powerful 4-channel 40-watt speakers* front and backside to enhance students' listening experience, so they are more immersed in content when both watching and listening.

* Speaker option varies by model.



Front panel

Access frequently used menu directly

Use functions and hotkeys faster and easier. Flip Pro puts the buttons that users most frequently use on the front panel* so they can access more easily and intuitively.

* Built-in front panel is currently only available on WM75B and WM85B.




Ambient light sensor

Enjoy optimal content in any lighting conditions

The screen of Flip Pro is equipped with an ambient light sensor* to adjust the brightness according to lighting conditions. Whether the classroom is bright or dark, content can be enjoyed to the fullest.

* Ambient light sensor is currently only available on WM75B and WM85B.

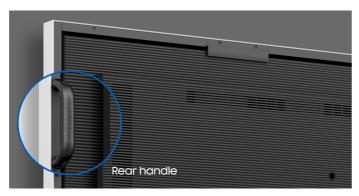

Rear handle

Easy moving. Less effort.

Move the Flip Pro display freely anywhere in the classroom. The rear handle helps teachers move the large display easily with little effort*.

- * Requires separate standing mount to move which must be purchased separately.
- * Rear handle is currently only available on WM75B and WM85B.



Protective screen technology

Clean screen and minimized damage risk

Samsung Flip Pro delivers peace of mind with a built-in Antimicrobial Coating* which inhibits microbial growth. Plus, the Flip's display is wrapped in a proprietary shatterproof film, ensuring the screen stays intact in the event of a break.

- * To perform its antibacterial function, this product has been treated with the biocidal substance Silver phosphate glass.

 * Antibacterial property does not protect users against bacteria and provides no protection against viruses including Covid-19.
- * Antimicrobial Coating is on surface of screen only and the effect may vary depending on conditions of use.
- * Antibacterial certification: UL2282 which is granted when the antibacterial effectiveness is more than 99%.

(Test method(JIS Z 2801): after inoculation of 0.4cc of liquid with bacteria(Escherichia coli and Staphylococcus aureus) on specimen(5cm x 5cm), a sterilized film(4cm x 4cm) is adhered and left in a thermo-hygrostat

with a relative humidity of 90% or more at 35°C for 24 hours, and then the efficiency of killing of the bacteria is measured / Test agency: KOTITI Testing & Research Institute) * For further details regarding regional restrictions on the antibacterial function, please refer to each country's Samsung.com website.

Application gallery

Versatility for various purposes, in any space

Samsung Flip Pro is available in a variety of sizes to suit any space in both corporate environments and education especially. Regardless of the size of a space, number of people or use case, Flip Pro is an optimal solution for users looking to enhance efficiency and creativity.

Corporate



Education











Specifications

	Model		WM55B	WM65B
	Diagon	al Sizo	55"	65"
	Туј		New Edge, 60Hz	New Edge, 60Hz
	Resol		3,840 x 2,160 (Landscape)	3,840 x 2,160 (Landscape)
Panel	Brightne		350cd/m2 (without glass)	350cd/m2 (without glass)
	Contrast R		4000:1 (Typ.)(without glass)	4000:1 (Typ.)(without glass)
	Viewing A	-	178:178	178:178
	Response Ti		8ms(Typ.)	8ms(Typ.)
6 1	Operation		16/7	16/7
Sound	Speake	• • • • • • • • • • • • • • • • • • • •	Built in Speaker (10W x 2CH)	Built in Speaker (10W x2CH)
		RGB	N/A	N/A
	INPUT	VIDEO	(Basic) HDMI1, DP1, (With Tray) HDMI1, USB-C	(Basic) HDMI1, DP1, (With Tray) HDMI1, USB-C
		AUDIO USB	N/A	N/A (Decia) UCD1 (With Tray) UCD 2 UCD Enterpol (In (Out) 1
		RGB	(Basic) USB 1, (With Tray) USB 2, USB External (In/Out) 1 N/A	(Basic) USB 1, (With Tray) USB 2, USB External (In/Out) 1 N/A
		VIDEO	N/A N/A	N/A
Connectivity	OUTPUT	AUDIO	1(Stereo Mini Jack)	1(Stereo Mini Jack)
		Touch Out	(Basic) Touch Out 1 (USB Upstream Type), (With Tray) Touch Out 1	(Basic) Touch Out1 (USB Upstream Type), (With Tray) Touch Out1
		SENSOR	N/A	N/A
			Touch Input	Touch Input
	EXTERNAL	CONTROL	RS232C thru stereo jack, RJ45(For MDC)	RS232C thru stereo jack, RJ45(For MDC)
	BT/V	ViFi	Yes (Keyboard/Mouse,speaker)	Yes (Keyboard/Mouse,speaker)
	Тур	oe	IR	IR
	# of Dr		20 touch (internal/external)	20 touch (internal/external)
		-	* Whiteboarding app works 4 drawing	* Whiteboarding app works 4 drawing
	Touch Po	en fype	Passive Pen with magnet	Passive Pen with magnet
	Object Recog	nition Range	2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)	2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)
	Touch Resp		(Brush Mode : Dynamic Object Recognition) 6.7ms	(Brush Mode : Dynamic Object Recognition) 6.7ms
Touch	Drawing Speed		26ms	26ms
	Ha		8%~12%	8%~12%
	Thick		2.85T	3.2T
	Hard		Heat Semi-Strengthened Glass	Heat Semi-Strengthened Glass
	ridiu		AG Flim(Anti glare)	AG Flim(Anti glare)
	Addition	nal Film	Hydrophobic Coated PET (Shatter-proof flim)	Hydrophobic Coated PET (Shatter-proof flim)
			Antimicrobial Coating	Antimicrobial Coating
	Тур		Internal	Internal
	Powers		AC100-240V 50/60Hz	AC100-240V 50/60Hz
		Max[W/h]	154W(100-240V)	528W(100-240V), 506W(220-240V), OPS(16V/4.5A)
Power		Typical[W/h]	95W	124W
	Power Consumption	Rating[W/h]	140W	175W
		Stand-by[W/h]	0.5	0.5
		BTU[W/h]	525.14W	656.425W
	Dimension (mm)	Set	1297.4 x 768.2 x 59.9	1522.4 x 897.6 x 62.9
		Package	1464 x 915 x 190	1691 x 1055 x 198
	Weight (kg)	Set	28.6	39.7
		Package	35.9	48.2
	Col		Gray White	Gray White
Mechanical	VESAN		400 * 400	400 * 400
Spec	Protection		Yes	Yes
	Stand Madia Blaves	**	Stand / Wallmount (STN-WM55R / WMN4277SF)	Wallmount (WMN-WN65R)
	Media Player		N/A	N/A
	Rota		Landscape only	Landscape only
	Power Cab		3M /2.4M(US)	3M / 2.4M(US)
	Acces	•	Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG	Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black) Waranty/QSG
Operation	Operating To		0°C~ 40°C	0°C~ 40°C
	Hum	•	10 ~ 80%, non-condensing	10 ~ 80%, non-condensing
	Crient		Flip App	Flip App
	Orient		Landscape / Portrait Touch module(IR), Built in Speaker(20W 2CH),	Landscape / Portrait Touch module(IR), Built in Speaker(20W 2CH),
	H/	W	WiFi/BT Module Embedded	WiFi/BT Module Embedded
		First screen	Flip S/W (whiteboarding app)	Flip S/W (whiteboarding app)
			Document viewer	Document viewer
			SmartView+	SmartView+
			Video player	Video player
		Apps	Web browser Workspace	Web browser Workspace
			(RDP/VNC, Office365, VMWare)	(RDP/VNC, Office365, VMWare)
Feature	S/W		Edu tool	Edu tool
			mimioconnect(N.America Only)	mimioconnect(N.America Only)
		WebRTC	Yes	Yes
		Upgradable web engine	Yes	Yes
		SmartView+	Yes	Yes
		Airplay	Ready to update ('22.5)	Ready to update ('22.5)
	Internal Player (Embedded H/W)	Platform	Pontus-M (Tizen 6.5)	Pontus-M (Tizen 6.5)
		Processor	CA72 Quad(1.7GHz)	CA72 Quad(1.7GHz)
		Storage	32GB (2.65GB Occupied by O/S, 29.35GB Available)	32GB (2.65GB Occupied by O/S, 29.35GB Available)
		Operating System	Tizen 6.5 : Samsung Proprietary OS(VDLinux)	Tizen 6.5 : Samsung Proprietary OS(VDLinux)
	Security	- p ting 0 j otcini	802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP	802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP
	Inclu	ded	Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG	Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG
	metu	Stand	STN-WM55R	N/A (3rd party company stand can be supported through VESA)
Accessories		Mount	WMN-4277SF	WMN-WM65R
	Optional	OPS Mount	-	-
		Tray	CY-TF65BBC	CY-TF65BBC
	3rd party compatibili	•	Logitech RallyBar Plus	Logitech RallyBar Plus
			• ,	• .

	Model		WM75B	WM85B	
	Diagon	al Size	75"	85"	
	Туј		New Edge, 60Hz	New Edge, 60Hz	
	Resol	ution	3,840 x 2,160 (Landscape)	3,840 x 2,160 (Landscape)	
Panel	Brightne	ess(Typ.)	350cd/m2 (without glass)	350cd/m2 (without glass)	
runct	Contrast R		4700:1 (Typ.)(without glass)	4700:1 (Typ.)(without glass)	
	Viewing A	•	178:178	178:178	
	Response Ti		6ms(Typ.)	6ms(Typ.)	
Count	Operatio		16/7	16/7	
Sound	Speake	RGB	Built in Speaker (10W x 4CH)	Built in Speaker (10W x 4CH)	
		VIDEO	N/A HDMI 2(Rear1, Front 1), DP1, USB C(Front), OPS I/F	N/A HDMI 2(Rear 1, Front 1), DP1, USB C(Front), OPS I/F	
	INPUT	AUDIO	N/A	N/A	
		USB	2(For SoC, Rear/Front), 1 (for external 3.0x1(Front))	2(For SoC, Rear/Front), 1 (for external 3.0x1(Front))	
		RGB	N/A	N/A	
Connectivity	OUTDUT	VIDEO	N/A	N/A	
omiccivity	OUTPUT	AUDIO	1(Stereo Mini Jack)	1(Stereo Mini Jack)	
		Touch Out	Touch Out 2 (USB Upstream Type, Front 1, Rear1)	Touch Out 2 (USB Upstream Type, Front 1, Rear 1)	
	INTERNAL	SENSOR	N/A	N/A	
	EXTERNAL	CONTROL	Touch Input	Touch Input	
	BT/V	NiFi	RS232C thru stereo jack, RJ45(For MDC) Yes (Keyboard/Mouse, Speaker)	RS232C thru stereo jack, RJ45(For MDC) Yes (Keyboard/Mouse,speaker)	
	Typ		IR	IR	
			20 touch (internal/external)	20 touch (internal/external)	
	# of Drawing		* Whiteboarding app works 4 drawing	* Whiteboarding app works 4 drawing	
	Touch Pe	en Type	Passive Pen with magnet	Passive Pen with magnet	
	Object Recog	nition Range	2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)	2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)	
	Touch Resp	onse Time	(Brush Mode : Dynamic Object Recognition) 6.7ms	(Brush Mode : Dynamic Object Recognition) 6.7ms	
Touch	Drawing Speed		26ms	26ms	
	Ha	•	8%~12%	8%~12%	
	Thick		3.2T	3.2T	
	Hard	ness	Heat Semi-Strengthened Glass	Heat Semi-Strengthened Glass	
			AG Flim(Anti glare)	AG Flim(Anti glare)	
	Addition	nal Film	Hydrophobic Coated PET (Shatter-proof flim) Antimicrobial Coating	Hydrophobic Coated PET (Shatter-proof flim) Antimicrobial Coating	
	Тур	oe .	Internal (Main1ea, OPS1ea)	Internal (Main 1ea, OPS 1ea)	
	Power!		AC100-240V 50/60Hz	AC100-240V 50/60Hz	
		Max[W/h]	473W(100-240V), 451W(220-240V), OPS(16V/4.5A)	528W(100-240V), 506W(220-240V), OPS(16V/4.5A)	
Power		Typical[W/h]	187W	197W	
	Power Consumption	Rating[W/h]	430W(100-240V), 410W(220-240V), OPS(16V/4.5A)	480W(100-240V), 460W(220-240V), OPS(16V4.5A)	
		Stand-by[W/h]	0.5	0.5	
		BTU[W/h]	1612.93W(100-240V), 1537.91W(220-240V), OPS(16V/4.5A)	TBD	
	Dimension (mm)	Set	1724 x 1026.3 x 89	1945.8 x 1151.1 x 89	
		Package	1905 x 1189 x 287	2136 x 1318 x 260	
	Weight (kg)	Set	59.3 72.2	75.2 91.6	
	Col	Package	72.2 Gray White	Gray White	
Mechanical	VESA		400 * 400	600 * 400	
Spec	Protection		Yes	Yes	
·	Stand		Wall Mount	Wall Mount	
			OPS Slot support	OPS Slot support	
	Media Player Option Type				
	Media Player Rota		Landscape only	Landscape only	
		tion	Landscape only 3M /2.4M(US)	Landscape only 3M /2.4M(US)	
	Rota	tion le Length		3M /2.4M(US)	
Operation	Rota Power Cab	tion le Length ssory	3M /2.4M(US)	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~ 40°C	
Operation	Rota Power Cab Acces Operating Te Hum	tion le Length ssory emperature idity	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C~ 40°C 10 ~ 80%, non-condensing	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~ 40°C 10 ~ 80%, non-condensing	
Operation	Rota Power Cab Acces Operating To Hum Ke	tion de Length ssory emperature idity	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C~ 40°C 10 ~ 80%, non-condensing Flip App	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~ 40°C 10 ~ 80%, non-condensing Flip App	
Operation	Rota Power Cab Acces Operating To Hum Ke Orient	tion le Length ssory emperature idity ey aation	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C~ 40°C 10 ~ 80%, non-condensing Flip App Landscape	3M /2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~ 40°C 10 ~ 80%, non-condensing Flip App Landscape	
Operation	Rota Power Cab Acces Operating To Hum Ke	tion le Length ssory emperature idity ey aation	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box)	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~40°C 10~80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B	
Operation	Rota Power Cab Acces Operating To Hum Ke Orient	tion le Length ssory emperature idity ey aation	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded	
Operation	Rota Power Cab Acces Operating To Hum Ke Orient	tion le Length ssory emperature idity ey sation	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C~ 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~40°C 10~80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B	
Operation	Rota Power Cab Acces Operating To Hum Ke Orient	tion le Length ssory emperature idity ey sation	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C - 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~40°C 10~80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+	
Operation	Rota Power Cab Acces Operating To Hum Ke Orient	tion le Length ssory emperature idity ey ation W First screen	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~ 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player	
Operation	Rota Power Cab Acces Operating To Hum Ke Orient	tion le Length ssory emperature idity ey sation	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C - 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~40°C 10~80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+	
	Rota Power Cab Acces Operating Ti Hum Ke Orient H/	tion le Length ssory emperature idity ey ation W First screen	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare)	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare)	
Operation Feature	Rota Power Cab Acces Operating To Hum Ke Orient	tion le Length ssory emperature idity ey ation W First screen	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFI/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Offica365, VMWare) Edu tool	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~ 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool	
	Rota Power Cab Acces Operating Ti Hum Ke Orient H/	tion le Length ssory emperature idity ey ation W First screen	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare)	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare)	
	Rota Power Cab Acces Operating Ti Hum Ke Orient H/	tion le Length ssory emperature idity ety cation W First screen Apps WebRTC Upgradable web	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Offica365, VMWare) Edu tool mimioconnect(N. America Only) Yes	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C- 40°C 10 - 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Offica365, VMWare) Edu tool mimioconnect(N.America Only) Yes	
	Rota Power Cab Acces Operating Ti Hum Ke Orient H/	tion le Length ssory emperature idity ety station W First screen Apps WebRTC Upgradable web engine	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N. America Only) Yes Yes	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~ 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes	
	Rota Power Cab Acces Operating Ti Hum Ke Orient H/	tion le Length ssory emperature idity ey sation W First screen Apps WebRTC Upgradable web engine SmartView+	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Offica365, VMWare) Edu tool mimioconnect(N. America Only) Yes Yes	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C- 40°C 10 - 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes	
	Rota Power Cab Acces Operating Ti Hum Ke Orient H/	tion lle Length ssory emperature idity ety attion W First screen Apps WebRTC Upgradable web engine SmartView+ Airplay	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Yes Ready to update ('22.5)	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C- 40°C 10 - 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Ready to update ('22.5)	
	Rota Power Cab Acces Operating To Hum Ke Orient H/	tion lle Length ssory emperature idity ety attion W First screen Apps WebRTC Upgradable web engine SmartView+ Airplay Platform	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N. America Only) Yes Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5)	3M /2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~40°C 10~80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5)	
	Rota Power Cab Acces Operating Ti Hum Ke Orient H/	tion lle Length ssory emperature idity ety attion W First screen Apps WebRTC Upgradable web engine SmartView+ Airplay Platform Processor	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N. America Only) Yes Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72 1.7GHz Quad-Core CPU 2MB L2	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A721.7GHz Quad-Core CPU 2MB L2	
	Rota Power Cab Acces Operating To Hum Ke Orient H/	tion le Length ssory emperature idity ety extion W First screen Apps WebRTC Upgradable web engine SmartView+ Airplay Platform Processor Storage	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C- 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72 1.7GHz Quad-Core CPU 2MB L2 32GB (2.65GB Occupied by O/S, 29.35GB Available)	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~ 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N. America Only) Yes Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72 1.7GHz Quad-Core CPU 2MB L2 32GB (2.65GB Occupied by O/S, 29.35GB Available)	
	Rota Power Cab Acces Operating To Hum Ke Orient H/	tion lle Length ssory emperature idity ety attion W First screen Apps WebRTC Upgradable web engine SmartView+ Airplay Platform Processor	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N. America Only) Yes Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72 1.7GHz Quad-Core CPU 2MB L2	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A721.7GHz Quad-Core CPU 2MB L2	
	Rota Power Cab Acces Operating To Hum Ke Orient H/ S/W Internal Player (Embedded H/W)	tion le Length ssory emperature idity ety extion W First screen Apps WebRTC Upgradable web engine SmartView+ Airplay Platform Processor Storage Operating System	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72 1.7GHz Quad-Core CPU 2MB L2 32GB (2.65GB Occupied by O/S, 29.35GB Available) Tizen 6.5 : Samsung Proprietary OS(VDLinux)	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C~ 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72 1.7GHz Quad-Core CPU 2MB L2 32GB (2.65GB Occupied by O/S, 29.35GB Available) Tizen 6.5 : Samsung Proprietary OS(VDLinux) 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-PEAP	
	Rota Power Cab Acces Operating To Hum Ke Orient H/ S/W Internal Player (Embedded H/W) Security	tion le Length ssory emperature idity ety extion W First screen Apps WebRTC Upgradable web engine SmartView+ Airplay Platform Processor Storage Operating System	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72 1.7GHz Quad-Core CPU 2MB L2 32GB (2.65GB Occupied by O/S, 29.35GB Available) Tizen 6.5 : Samsung Proprietary OS(VDLinux) 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C- 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A721.7GHz Quad-Core CPU 2MB L2 32GB (2.65GB Occupied by 0/5, 29.35GB Available) Tizen 6.5 : Samsung Proprietary OS(VDLinux) 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TLS, EAP-PEAP Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QS0	
Operation Feature Accessories	Rota Power Cab Acces Operating To Hum Ke Orient H/ S/W Internal Player (Embedded H/W) Security Inclu	tion lle Length ssory emperature idity ety attion W First screen Apps WebRTC Upgradable web engine SmartView+ Airplay Platform Processor Storage Operating System ded Stand Mount	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N. America Only) Yes Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72.1.7GHz Quad-Core CPU ZMB L2 32GB (2.65GB Occupied by O/S, 29.35GB Available) Tizen 6.5 : Samsung Proprietary OS(VDLinux) 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG N/A (3rd party company stand can be supported through VESA)	3M /2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/ 0°C40°C 10 ~80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS B Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72 1.7GHz Quad-Core CPU 2MB L2 32GB (2.65GB Occupied by O/S, 29.35GB Available) Tize 6.5 : Samsung Proprietary OS(VDLinux) 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TLS, EAP-PEAP Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QS(N/A (3rd party company stand can be supported through VESA WMN8200SF	
Feature	Rota Power Cab Acces Operating To Hum Ke Orient H/ S/W Internal Player (Embedded H/W) Security	tion lle Length ssory emperature idity ety attion W First screen Apps WebRTC Upgradable web engine SmartView+ Airplay Platform Processor Storage Operating System ded Stand	3M / 2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N. America Only) Yes Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72 1.7GHz Quad-Core CPU 2MB L2 32GB (2.65GB Occupied by O/S, 29.35GB Available) Tizen 6.5 : Samsung Proprietary OS(VDLinux) 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TELS, EAP-PEAP Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG N/A (3rd party company stand can be supported through VESA)	3M /2.4M(US) Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/v 0°C - 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Brail Built in Speaker(40W 4CH), WiFi/BT Module Embedded Flip S/W (whiteboarding app) Document viewer SmartView+ Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) Yes Yes Ready to update ('22.5) Pontus-M (Tizen 6.5) Cortex A72.1.7GHz Quad-Core CPU 2MB L2 32GB (2.65GB Occupied by O/S, 29.35GB Available) Tizen 6.5 : Samsung Proprietary OS(VDLinux) 802.1x(WPAZ Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSC N/A (3rd party company stand can be supported through VESA	